




PRECISIONFAB™

PTFE/Teflon® Coated Fiberglass Belts - Standard

The workhorse of Precision’s Standard Grade PTFE Coated Fiberglass Belts were created to deliver the best possible balance of performance in heat transfer, release, flexibility and overall value. Each belt is manufactured from woven fiberglass substrates with an optimal PTFE content, and designed to leave a minimal fabric impression

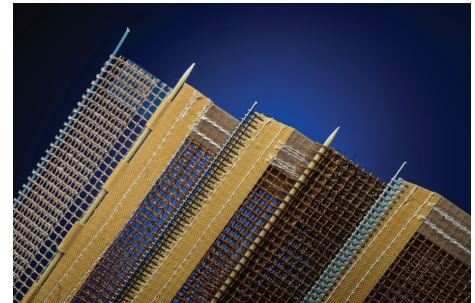

Features and Benefits

- Excellent release characteristics
- Low friction surface
- Operational and dimensionally stable from –100°F (-73° C) to +500°F (+260°C)
- Chemical resistant
- Virtually zero flow under heat and pressure
- FDA compliant (21 CFR 177.1550) for food processing, packaging and handling

Physical Properties

| Product Number | Nominal Thickness (mil) | Coated Weight (lbs/sq yd) | Tensile Strength Warp / Fill (lbs/inch) | Tear Strength Warp / Fill (lbf) | Maximum Width |
|--------------------------|-------------------------|---------------------------|---|---------------------------------|---------------|
| PC-3 Standard Belt | 3 | 0.24 | 70 | 50 | 50" |
| PC-3 Standard 2 Ply Belt | 6 | .048 | 170 / 165 | 4.5 / 4.0 | 4" |
| PC-10 Standard Belt | 10 | 0.91 | 310 / 175 | 12.0 / 7.0 | 60" |
| PC-14 Standard Belt | 14 | 1.35 | 500 / 300 | 20.0 / 15.0 | 37" |
| PC-20 Standard Belt | 20 | 1.55 | 400 / 300 | 20.0 / 15.0 | 140" |
| PC-27 Standard Belt | 27 | 1.76 | 425 / 500 | 50.0 / 55.0 | 189" |

These product properties are suggestive and all products can be customized or converted to fit specific application requirements. Please contact us to discuss your unique application needs.